




# MP1500EP

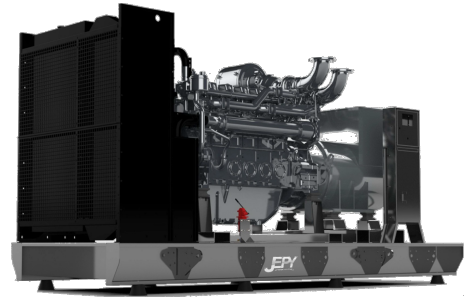

| Output Rating |           |     |         |       |
|---------------|-----------|-----|---------|-------|
| Voltage       | Frequency |     | Standby | Prime |
| 400 V         | 50 Hz     | KVA | 1650    | 1500  |
|               |           | KW  | 1320    | 1200  |

## Rating Definitions

Ratings are in accordance with ISO 8528, ISO 3046, BS 5514.

### Prime Rating

Applicable for supplying continuous electrical power (no limitation to annual hours of operation), at variable load, in lieu of utility power network; 10% overload is permitted for 1 hour in every 12 hours.

### Standby Rating

Applicable for supplying continuous electrical power, at variable load, in the event of a utility power failure; no overload is permitted on standby ratings.

### Standard Reference Conditions

Standard reference conditions 25°C (77°F) Air Inlet Temp, 100m (328 ft) A.S.L. 30% relative humidity.

| General Data                    |              |
|---------------------------------|--------------|
| Engine Make                     | Perkins      |
| Engine Model                    | 4012-46TAG2A |
| Alternator Make                 | Stamford     |
| Alternator Model                | PI 734C      |
| Control Unit                    | DSE 7x20     |
| Engine Speed: RPM               | 1500         |
| Fuel Tank Capacity (l)          | N.A.         |
| Fuel Consumption Standby (l/hr) | 326.3        |
| Fuel Consumption Prime (l/hr)   | 296.6        |
| Fuel Consumption 75% (l/hr)     | 225.7        |
| Fuel Consumption 50% (l/hr)     | 159.8        |



## Optional Features and Customization

Optional Features and Customization include:


- Weather and sound proof enclosure
- Stand-alone control panel
- Synchronizing panel
- Load sharing
- Residential silencer
- CE certification
- LV Circuit Breaker

## Dimensions and Weights

|              | Length (mm) | Width (mm) | Height (mm) | Weight (Kg) |       |
|--------------|-------------|------------|-------------|-------------|-------|
|              |             |            |             | Dry         | Wet   |
| Open Set     | 5100        | 2090       | 2510        | 10080       | 10200 |
| Canopied Set | 12192       | 2438       | 2896        | N.A.        | N.A.  |

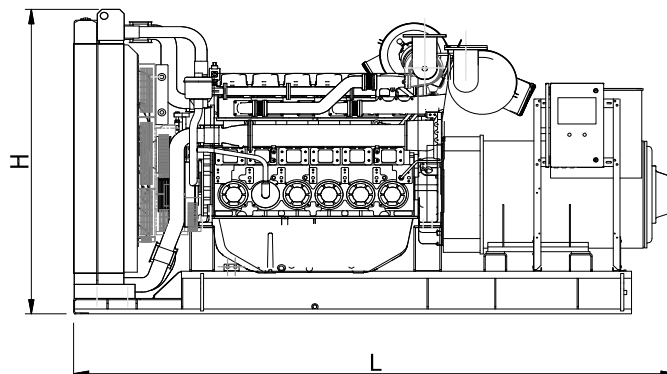

• Dimensions and weights are for guidance only. Certified drawings are available upon request. Specifications may change without notice.

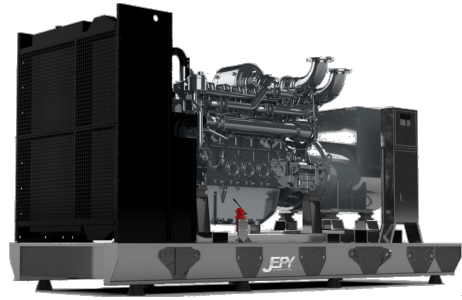

# MP1500EP

| Engine Data          |                   |               |
|----------------------|-------------------|---------------|
| Engine Model         |                   | 4012-46TAG2A  |
| No. of Cylinders     |                   | 12            |
| Alignment            |                   | 60° Vee form  |
| Cycle                |                   | 4 stroke      |
| Bore                 | mm (in)           | 160 (6.3)     |
| Stroke               | mm (in)           | 190 (7.5)     |
| Induction            |                   | TC AW         |
| Cooling Method       |                   | WATER         |
| Governing Type       |                   | ELECTRONIC    |
| Governing Class      |                   | ISO 8528      |
| Compression Ratio    |                   | 13.0 : 1      |
| Displacement         | L (cu.in)         | 45.842 (2797) |
| Moment of Inertia    | kg m <sup>2</sup> | 19.3          |
| Voltage              | VDC               | 24            |
| Ground               |                   | Negative      |
| Battery Charger Amps |                   | 40            |
| Engine Weight Dry    | Kg (lb)           | 4400 (9700)   |
| Engine Weight Wet    | Kg (lb)           | 4604 (10150)  |

| Engine Performance Data    |           |              |
|----------------------------|-----------|--------------|
| Engine Speed               | rpm       | 1500         |
| Gross Engine Power Prime   | kW (hp)   | 1113 (1492)  |
| Gross Engine Power Standby | kW (hp)   | 1224 (1641)  |
| BMEP Prime                 | kPa (psi) | 2323 (336.9) |
| BMEP Standby               | kPa (psi) | 2546 (369.3) |

| Air System                        |                     |     |
|-----------------------------------|---------------------|-----|
| Combustion Air Flow Prime         | m <sup>3</sup> /min | 120 |
| Combustion Air Flow Standby       | m <sup>3</sup> /min | 128 |
| Max. Combustion Air Intake Restri | kPa                 | 4   |

| Alternator Physical Data       |  |           |
|--------------------------------|--|-----------|
| No. of Bearings                |  | 1         |
| Insulation Class               |  | H         |
| Winding Pitch                  |  | 2/3       |
| Winding Code                   |  | N.A.      |
| Wires                          |  | 12        |
| Ingress Protection Rating      |  | IP23      |
| Excitation System              |  | Shunt     |
| AVR Model                      |  | MX341     |
| Radio Interference Suppression |  | EN61000-6 |

• Dimensions and weights are for guidance only. Certified drawings are available upon request. Specifications may change without notice.

| Fuel System                     |      |                 |
|---------------------------------|------|-----------------|
| Recommended Fuel                |      | Class A2 Diesel |
| Fuel Consumption Prime (110%)   | l/hr | 326.3           |
| Fuel Consumption Prime (100%)   | l/hr | 296.6           |
| Fuel Consumption Prime (75%)    | l/hr | 225.7           |
| Fuel Consumption Prime (50%)    | l/hr | 159.8           |
| Fuel Consumption Standby (110%) | l/hr | N.A.            |
| Fuel Consumption Standby (100%) | l/hr | 326.3           |
| Fuel Consumption Standby (75%)  | l/hr | 246.4           |
| Fuel Consumption Standby (50%)  | l/hr | 172.6           |
| Fuel Consumption Continuous     | l/hr | N.A.            |

(Based on diesel fuel with a specific gravity of 0.86 and conforming to BS2869 classA2, EN590)

| Cooling System                   |     |     |
|----------------------------------|-----|-----|
| Cooling System Capacity          | (l) | 196 |
| Heat Radiation to Room*: Prime   | kW  | 151 |
| Heat Radiation to Room*: Standby | kW  | 172 |
| Radiator Fan Load                | kW  | 42  |
| External Restriction to Airflow  | Pa  | 250 |

| Lubrication System |     |                    |
|--------------------|-----|--------------------|
| Oil Filter Type    |     | Spin-on, Full flow |
| Total Oil Capacity | (l) | 177                |
| Oil Pan Capacity:  | (l) | 159                |
| Oil Type           |     | SAE 15W40          |
| Oil Cooling Method |     | Water              |

| Exhaust System                 |                     |     |
|--------------------------------|---------------------|-----|
| Maximum Allowable Back Pressur | kPa                 | 5   |
| Exhaust Gas Flow: Prime        | m <sup>3</sup> /min | 315 |
| Exhaust Gas Flow: Standby      | m <sup>3</sup> /min | 315 |
| Exhaust Gas T°: Prime          | °C                  | 470 |
| Exhaust Gas T°: Standby        | °C                  | 470 |

| Alternator Operating Data          |     |      |
|------------------------------------|-----|------|
| Overspeed                          | rpm | 2250 |
| Voltage Regulation: (Steady state) | %   | ±1   |
| Total Harmonic content             | %   | <5%  |
| Short Circuit Capacity             | %   | 300% |
| Reactance (Xd)                     | %   | 296  |
| Reactance (X'd)                    | %   | 18   |
| Reactance (X''d)                   | %   | 13   |