




MP2500EM

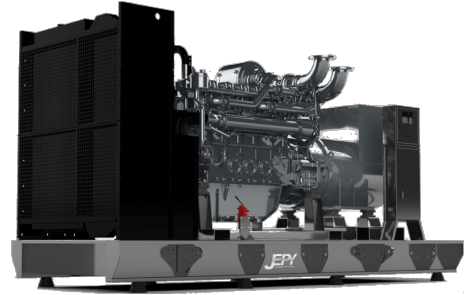

Output Rating				
Voltage	Frequency		Standby	Prime
400 V	50 Hz	KVA	2805	2550
		KW	2244	2040

Rating Definitions

Ratings are in accordance with ISO 8528, ISO 3046, BS 5514.

Prime Rating

Applicable for supplying continuous electrical power (no limitation to annual hours of operation), at variable load, in lieu of utility power network; 10% overload is permitted for 1 hour in every 12 hours.

Standby Rating

Applicable for supplying continuous electrical power, at variable load, in the event of a utility power failure; no overload is permitted on standby ratings.

Standard Reference Conditions

Standard reference conditions 25°C (77°F) Air Inlet Temp, 100m (328 ft) A.S.L. 30% relative humidity.

General Data	
Engine Make	MTU
Engine Model	20V4000G14F
Alternator Make	Leroy Somer
Alternator Model	LSA 53.2 M7
Control Unit	DSE 7320
Engine Speed: RPM	1500
Fuel Tank Capacity (l)	TBA
Fuel Consumption Standby (l/hr)	554.0
Fuel Consumption Prime (l/hr)	508.9
Fuel Consumption 75% (l/hr)	387.7
Fuel Consumption 50% (l/hr)	279.6



Optional Features and Customization

Optional Features and Customization include:

- Weather and sound proof enclosure
- Stand-alone control panel
- Synchronizing panel
- Load sharing
- Residential silencer
- CE certification
- LV Circuit Breaker


Dimensions and Weights

	Length (mm)	Width (mm)	Height (mm)	Weight (Kg)	
				Dry	Wet
Open Set	6670	2350	2800	19350	19550
Canopied Set	TBA	TBA	TBA	TBA	TBA

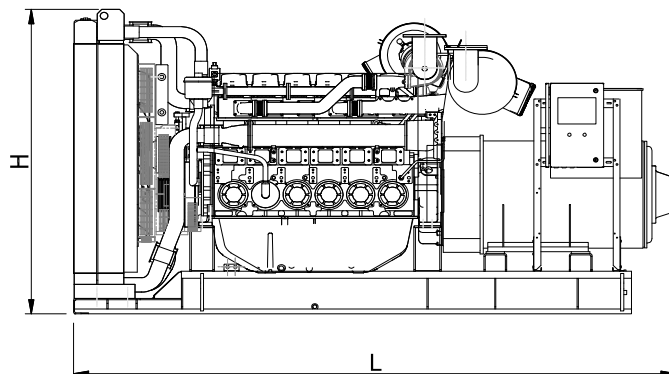

• Dimensions and weights are for guidance only. Certified drawings are available upon request. Specifications may change without notice.

MP2500EM

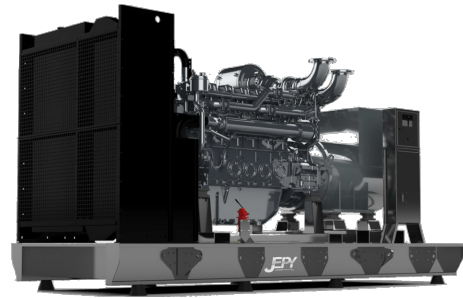

Engine Data		
Engine Model		20V400G14F
No. of Cylinders		20
Alignment		90° V
Cycle		4-cycle
Bore	mm (in)	170 (6.7)
Stroke	mm (in)	210 (8.3)
Induction		TC-AC
Cooling Method		Water
Governing Type		Electronic
Governing Class		ECU 9
Compression Ratio		16.4
Displacement	L (cu.in)	4.77 (291)
Moment of Inertia	kg m ²	N.A.
Voltage	VDC	24
Ground		Negative
Capacity		N.A.
Engine Weight Dry	Kg (lb)	9290 (20481)
Engine Weight Wet	Kg (lb)	9500 (20944)

Engine Performance Data		
Engine Speed	rpm	1500
Gross Engine Power Prime	kW (hp)	2200 (2950)
Gross Engine Power Standby	kW (hp)	2420 (3245)
BMEP Prime	kPa (psi)	N.A.
BMEP Standby	kPa (psi)	N.A.

Air System		
Combustion Air Flow Prime	m ³ /min	144
Combustion Air Flow Standby	m ³ /min	159
Max. Combustion Air Intake Restri	kPa	5

Alternator Physical Data		
No. of Bearings		1
Insulation Class		H
Winding Pitch		2/3
Winding Code		N.A.
Wires		N.A.
Ingress Protection Rating		IP23
Excitation System		S-E, Brushless
AVR Model		Electronic

• Dimensions and weights are for guidance only. Certified drawings are available upon request. Specifications may change without notice.

Fuel System		
Recommended Fuel		Class A2 Diesel
Fuel Consumption Prime (110%)	l/hr	554.0
Fuel Consumption Prime (100%)	l/hr	508.9
Fuel Consumption Prime (75%)	l/hr	387.7
Fuel Consumption Prime (50%)	l/hr	279.6
Fuel Consumption Standby (110%)	l/hr	N.A.
Fuel Consumption Standby (100%)	l/hr	554.0
Fuel Consumption Standby (75%)	l/hr	419.9
Fuel Consumption Standby (50%)	l/hr	293.0
Fuel Consumption Continuous	l/hr	N.A.

(Based on diesel fuel with a specific gravity of 0.86 and conforming to BS2869 classA2, EN590)

Cooling System		
Cooling System Capacity	(l)	N.A.
Heat rejection to coolant*: Prime	kW	860
Heat rejection to coolant*: Standby	kW	910
Fan power for mech. Rad. (40°C)	kWm	44
Cooling air flow	m ³ /min	N.A.

Lubrication System		
Oil Filter Type		Replaceable elt.
Total Oil Capacity	(l)	300
Oil Pan Capacity:	(l)	N.A.
Oil Type		SAE 15W40
Oil Cooling Method		Water

Exhaust System		
Maximum Allowable Back Pressur	kPa	8.5
Exhaust Gas Flow: Prime	m ³ /min	390
Exhaust Gas Flow: Standby	m ³ /min	426
Exhaust Gas T°: Prime	°C	580
Exhaust Gas T°: Standby	°C	560

Alternator Operating Data		
Overspeed	rpm	2250
Voltage Regulation: (Steady state)	%	±0.25
Wave Form NEMA = TIF		50
Wave Form IEC = THF	%	2
Total Harmonic content LL/LN	%	N.A.
Radio Interference		EN61000-6
Radiant Heat: 50 Hz	kW	N.A.