




MP1100EP

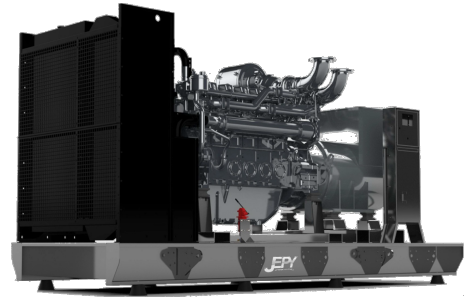

Output Rating				
Voltage	Frequency		Standby	Prime
400 V	50 Hz	KVA	1220	1110
		KW	976	888

Rating Definitions

Ratings are in accordance with ISO 8528, ISO 3046, BS 5514.

Prime Rating

Applicable for supplying continuous electrical power (no limitation to annual hours of operation), at variable load, in lieu of utility power network; 10% overload is permitted for 1 hour in every 12 hours.

Standby Rating

Applicable for supplying continuous electrical power, at variable load, in the event of a utility power failure; no overload is permitted on standby ratings.

Standard Reference Conditions

Standard reference conditions 25°C (77°F) Air Inlet Temp, 100m (328 ft) A.S.L. 30% relative humidity.

General Data	
Engine Make	Perkins
Engine Model	4008-30TAG3
Alternator Make	Stamford
Alternator Model	HCI634K
Control Unit	DSE 7x20
Engine Speed: RPM	1500
Fuel Tank Capacity (l)	N.A.
Fuel Consumption Standby (l/hr)	269.0
Fuel Consumption Prime (l/hr)	244.0
Fuel Consumption 75% (l/hr)	188.0
Fuel Consumption 50% (l/hr)	120.0



Optional Features and Customization

Optional Features and Customization include:


- Weather and sound proof enclosure
- Stand-alone control panel
- Synchronizing panel
- Load sharing
- Residential silencer
- CE certification
- LV Circuit Breaker

Dimensions and Weights

	Length (mm)	Width (mm)	Height (mm)	Weight (Kg)	
				Dry	Wet
Open Set	5100	2050	2510	9000	TBA
Canopied Set	TBA	TBA	TBA	TBA	TBA

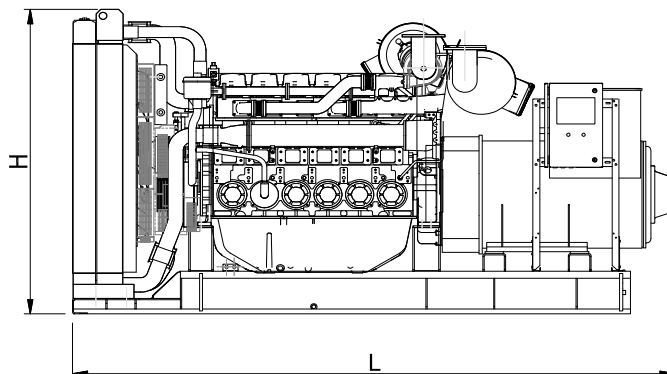

• Dimensions and weights are for guidance only. Certified drawings are available upon request. Specifications may change without notice.

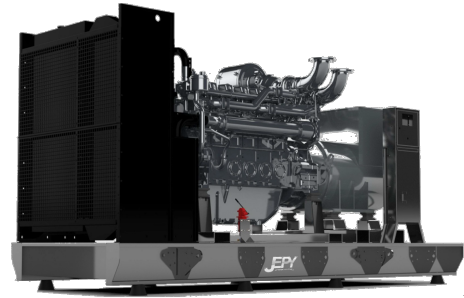

MP1100EP

Engine Data

Engine Model		4008-30TAG3
No. of Cylinders		8
Alignment		Vertical in-line
Cycle		4 stroke
Bore	mm (in)	160 (6.3)
Stroke	mm (in)	190 (7.5)
Induction		Turbocharged
Cooling Method		Water
Governing Type		Electronic
Governing Class		ISO 8528
Compression Ratio		13.0 : 1
Displacement	L (cu.in)	30.561 (1865)
Moment of Inertia	kg m ²	15.62
Voltage	VDC	24
Ground		Negative
Battery Charger Amps		55
Engine Weight Dry	Kg (lb)	3275 (7220)
Engine Weight Wet	Kg (lb)	3453 (7612)

Engine Performance Data

Engine Speed	rpm	1500
Gross Engine Power Prime	kW (hp)	947 (1270)
Gross Engine Power Standby	kW (hp)	1055 (1408)
BMEP Prime	kPa (psi)	2610 (378.5)
BMEP Standby	kPa (psi)	2892 (419.5)

Air System

Combustion Air Flow Prime	m ³ /min	84
Combustion Air Flow Standby	m ³ /min	95
Max. Combustion Air Intake Restri	kPa	5

Alternator Physical Data

No. of Bearings		1
Insulation Class		H
Winding Pitch		2/3
Winding Code		N.A.
Wires		12
Ingress Protection Rating		IP23
Excitation System		Self Excited
AVR Model		MX321
Radio Interference Suppression		EN61000-6

Fuel System

Recommended Fuel		Class A2 Diesel
Fuel Consumption Prime (110%)	l/hr	269.0
Fuel Consumption Prime (100%)	l/hr	244.0
Fuel Consumption Prime (75%)	l/hr	188.0
Fuel Consumption Prime (50%)	l/hr	120.0
Fuel Consumption Standby (110%)	l/hr	N.A.
Fuel Consumption Standby (100%)	l/hr	269.0
Fuel Consumption Standby (75%)	l/hr	210.5
Fuel Consumption Standby (50%)	l/hr	142.5
Fuel Consumption Continuous	l/hr	N.A.

(Based on diesel fuel with a specific gravity of 0.86 and conforming to BS2869 classA2, EN590)

Cooling System

Cooling System Capacity	(l)	140
Heat Radiation to Room*: Prime	kW	105
Heat Radiation to Room*: Standby	kW	126
Radiator Fan Load	kW	50
External Restriction to Airflow	Pa	250

Lubrication System

Oil Filter Type		Spin-on, Full flow
Total Oil Capacity	(l)	177
Oil Pan Capacity:	(l)	N.A.
Oil Type		SAE 15W40
Oil Cooling Method		Water

Exhaust System

Maximum Allowable Back Pressur	kPa	7
Exhaust Gas Flow: Prime	m ³ /min	205
Exhaust Gas Flow: Standby	m ³ /min	240
Exhaust Gas T°: Prime	°C	438
Exhaust Gas T°: Standby	°C	438

Alternator Operating Data

Overspeed	rpm	2250
Voltage Regulation: (Steady state)	%	±1
Total Harmonic content	%	5
Short Circuit Capacity	%	300
Reactance (Xd)	%	TBA
Reactance (X'd)	%	TBA
Reactance (X''d)	%	TBA

• Dimensions and weights are for guidance only. Certified drawings are available upon request. Specifications may change without notice.